


P14-W

Capacitive Humidity Sensor

Optimal for various humidity applications


Benefits & characteristics

- High chemical resistance
- Wide temperature range
- Resistance to condensation
- Fast recovery time
- Very low drift
- High humidity stability
- Customer-specific sensor available upon request

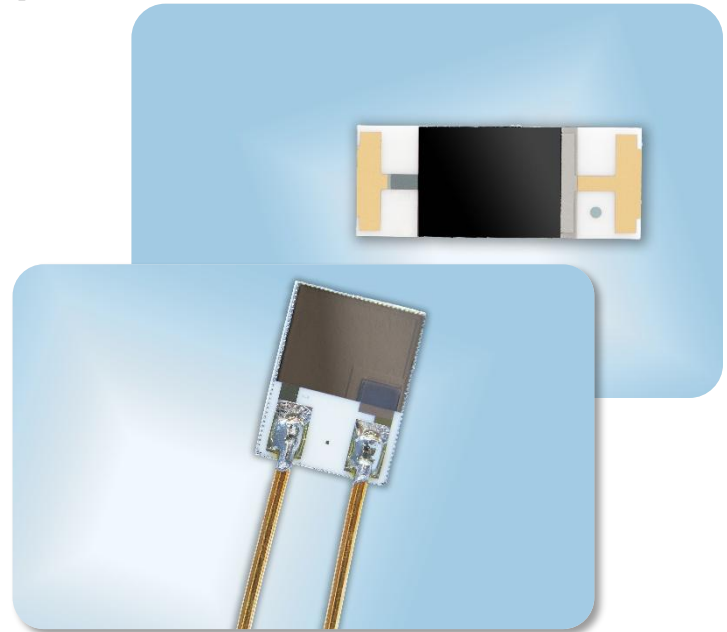


Illustration

Wired

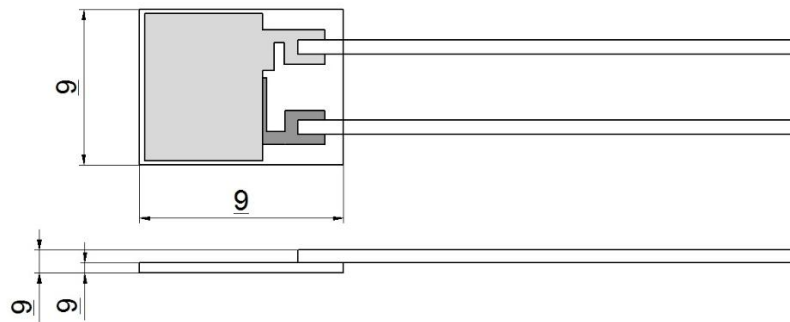

SMD

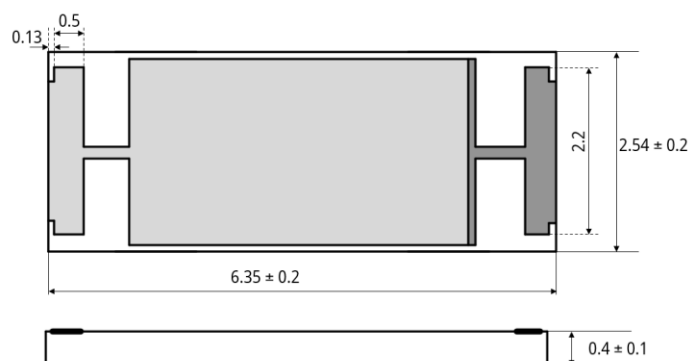




Technical data



	Wired	SMD
Dimensions (L x W x H/H2 in mm):	5 x 3.81 x 0.4 / 0.8	6.35 x 2.54 x 0.4
Capacitance at 30 % RH and + 23 °C (C ₃₀):*	150 pF ±50 pF	180 pF ±50 pF
Typical sensitivity at C ₃₀ = 150 pF/ 180 pF (15 % RH to 90 % RH):	0.25 pF/% RH	0.3 pF/% RH
Operating humidity range:	0 % RH to 100 % RH (maximal dew point +85 °C)	
Operating temperature range:	-50 °C to +150 °C	
Loss factor:	< 0.01 (at +23 °C, at 10 kHz, at 90 % RH)	
Linearity error:	< 1.5 % RH (15 % RH to 90 % RH at +23 °C after one point calibration)	
Hysteresis:	< 1.5 % RH	
Response time t ₆₃ :	< 5 s (50 % RH to 0 % RH at +23 °C)	
Temperature dependence (nominal):	$\Delta \% RH = (B1 \times \% RH + B2) \times T [^{\circ}C] + (B3 \times \% RH + B4)$ B1 = 0.0014 [1/ °C] B2 = 0.1325 [% RH/ °C] B3 = -0.0317 B4 = -3.0876 [% RH]	
Measurement frequency:	1 kHz to 100 kHz (recommended 10 kHz)	
Maximal supply voltage:	alternating signal without DC bias	
Connections:*	CuP-SIL-wire post-plated with Sn, 10 mm or Au/Cu-wire, Ø 0.4 mm, 10 mm, or SMD, automatic assembly compatible	


*customer-specific alternatives available

The calibration of the sensor must be done 5 days after soldering at the earliest.




Chracteristic Curve

Wired

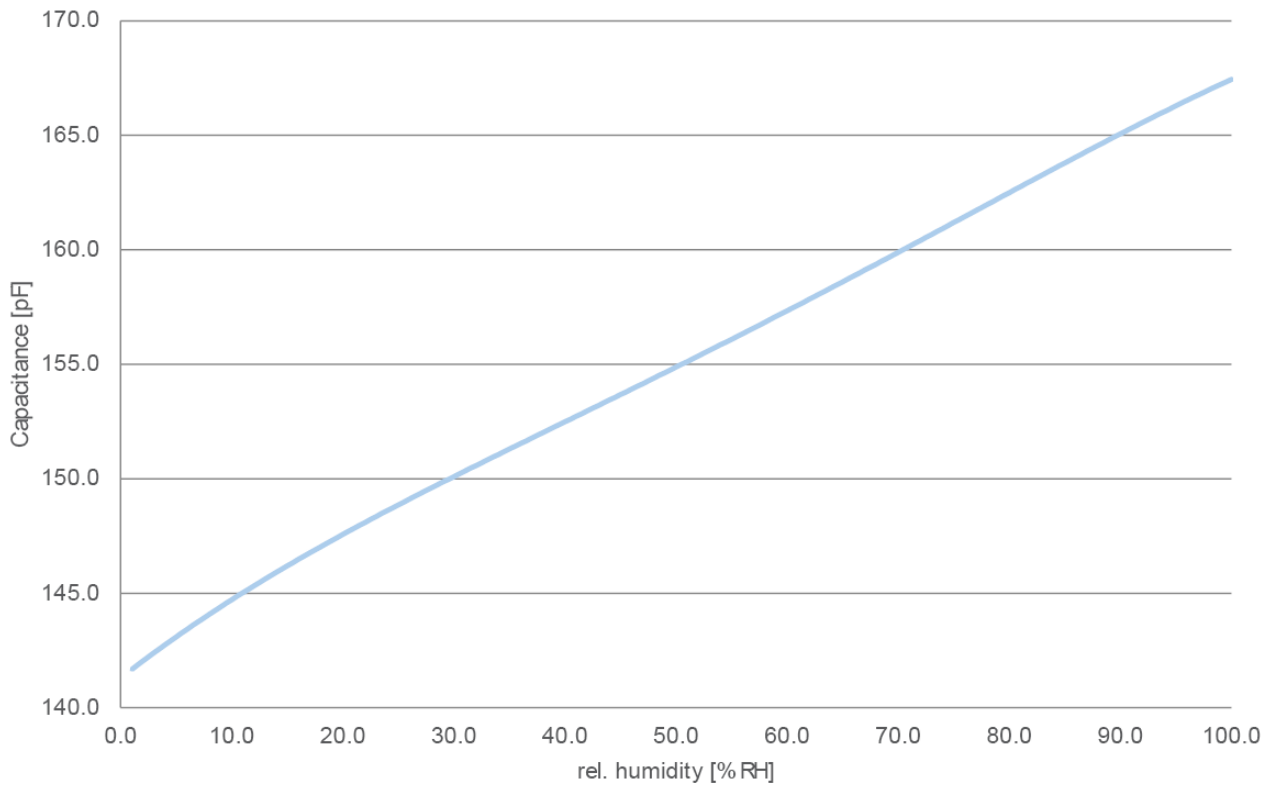

SMD

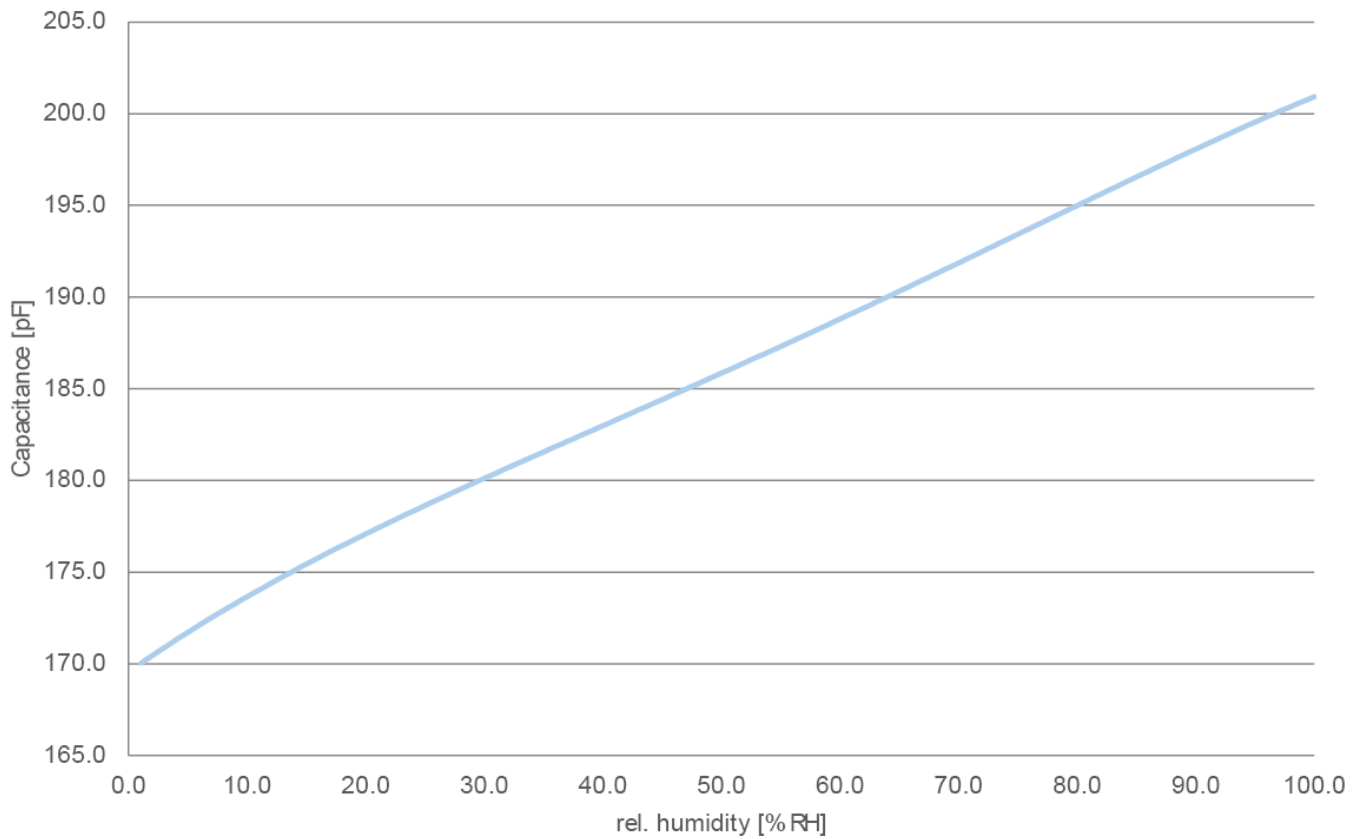



Order information

Order code	Product name	
150473	P14 (150pF $\pm$ 50pF)	SIL (CuP-SIL-wire post-plated with Sn, 10 mm)
103562	P14 SMD-G (180pF $\pm$ 50pF)	SMD
150466	P14-W (150pF $\pm$ 50pF)	Au/Cu-wire, $\varnothing$ 0.4 mm, 10 mm
150470	P14.S-W (150pF $\pm$ 50pF)	Cu/Ag-wire, 18 mm, AWG26, PTFE, insulated 8 mm



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.